




Terminal Dimensions

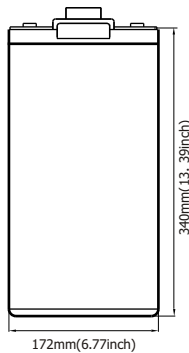

GT 2 Series

GASTON Gt2 Series batteries utilizes thick grids of modern technology are adopted so as to guarantee the design life up to 15 years. Advanced micro porous absorbed glass matt separator - minimizes diffusion of oxygen into the separator, reducing float charge current which suppressed the corrosion rate of the positive grid and extends the life of the battery.

Application

- Cable Television
- Communication Equipment
- Security System
- UPS
- Control Equipment
- Medical Equipment
- Emergency Power System

General Features

- Extra long life service design (up to 15 years).
- Non-Spillable construction design.
- ABS containers and covers(UL94HB, UL94V-0) optional.
- Safety valve installation for explosion proof.
- Higher safety & reliable construction.
- Exceptional deep discharge recovery performance.
- Low self discharge characteristic.
- Flexibility design for multiple install positions.

Construction





- ComponentRaw material
- PositiveLead dioxide
- NegativeLead
- ContainerABS
- CoverABS
- SealantEpoxy Resin
- Safety valveEPDR
- TerminalCopper
- SeparatorFiber glass
- ElectrolyteSulfuric acid

| | | | | |
|----------------------------------|---|-----------------|------------------------|------------------|
| Battery Model | GT2-260 | | | |
| Designed Floating Life | 15 Years | | | |
| Capacity(25°C) | 10HR(26A,1.80V) | 3HR(65A,1.80V) | 1HR(143A,1.75V) | |
| | 260Ah | 195Ah | 143Ah | |
| Dimensions | Length | Width | Height | Total Height |
| | 172mm(6.77inch) | 151mm(5.91inch) | 330mm(13.0inch) | 365mm(14.37inch) |
| Approx. Weight | 16.5Kg (36.3 lbs) | | | |
| Internal Resistance | Full charged at 25°C: 0.00057 Ohm | | | |
| Self Discharge | Storing for 90d capacity retention is over 94% (25°C) | | | |
| Capacity Affected by Temp.(20HR) | 40°C | 25°C | 0°C | -15°C |
| | 105% | 100% | 85% | 68% |
| Charge Voltage(25°C) | Cycle use | | Float use | |
| | 2.35V-2.40V@25°C(-5mV/°C), max. Current: 65A | | 2.23V @ 25°C (-3mV/°C) | |



GT 2 Stationary Range

GT2-260 2V260Ah/C₁₀

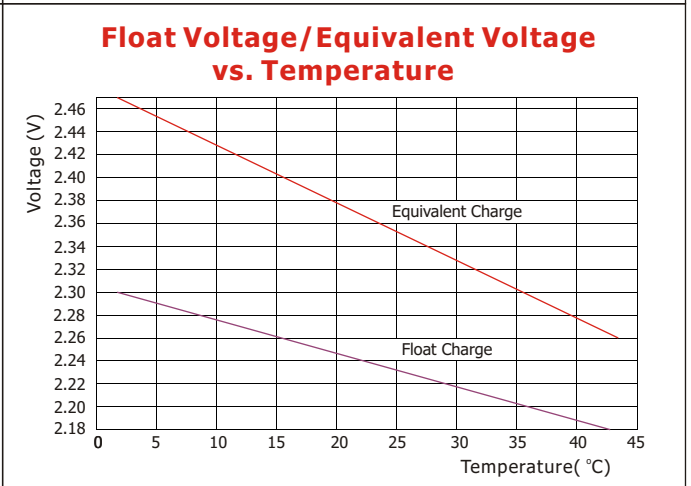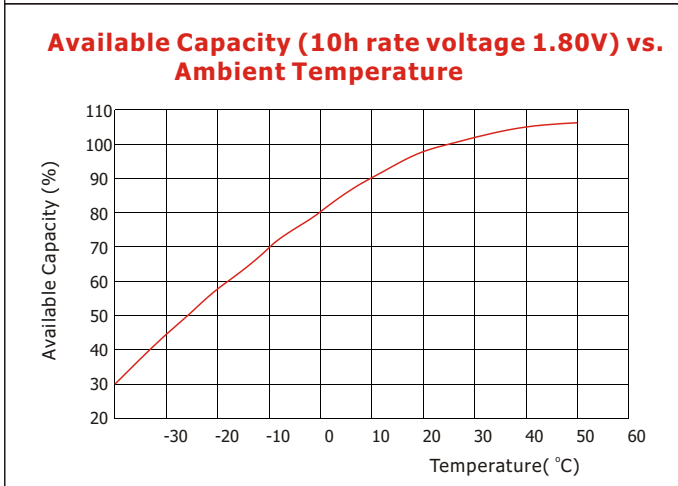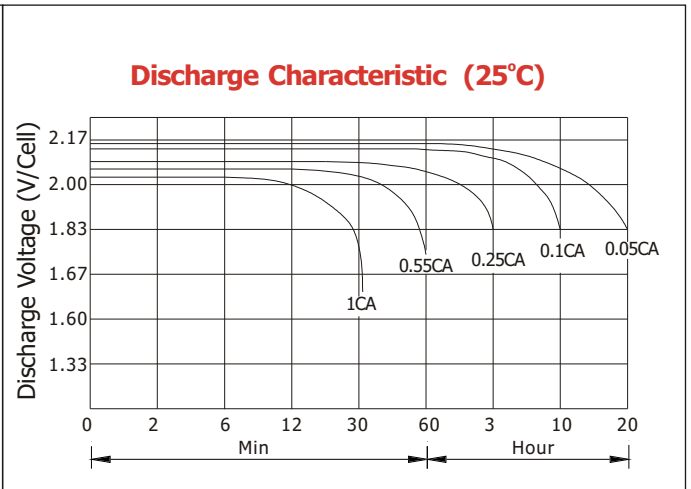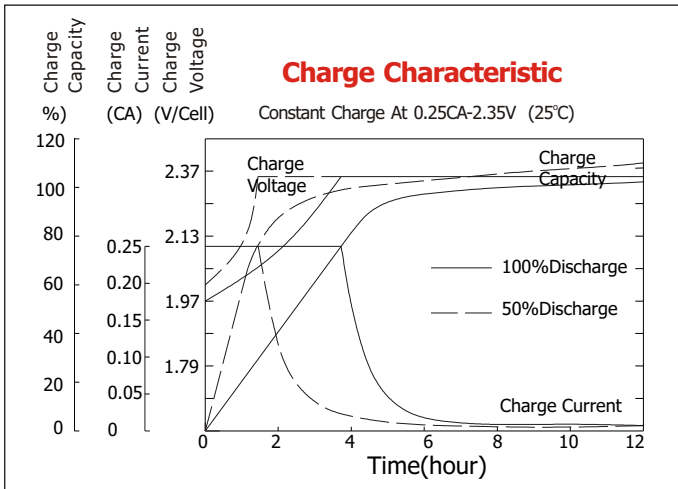

Constant current discharge ratings-amperes at 25°C (A)

| F.V/Time | 5MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 5HR | 8HR | 10HR | 24HR |
|----------|--------|--------|--------|--------|--------|-------|-------|-------|-------|-------|
| 1.60V | 433.30 | 362.90 | 268.70 | 169.90 | 100.10 | 73.50 | 49.80 | 34.30 | 28.50 | 12.80 |
| 1.70V | 374.20 | 317.20 | 236.80 | 153.90 | 94.20 | 69.60 | 48.20 | 33.20 | 27.70 | 12.70 |
| 1.75V | 356.60 | 300.30 | 220.10 | 146.70 | 90.90 | 67.40 | 46.80 | 32.80 | 27.30 | 12.60 |
| 1.80V | 343.00 | 283.10 | 205.90 | 137.50 | 87.00 | 65.40 | 45.80 | 32.20 | 26.70 | 12.10 |
| 1.85V | 303.70 | 251.10 | 183.60 | 124.10 | 78.50 | 62.00 | 44.20 | 31.20 | 26.00 | 11.90 |
| 1.90V | 261.10 | 212.30 | 157.50 | 110.20 | 73.60 | 58.20 | 42.60 | 30.10 | 25.10 | 11.70 |

Constant power discharge ratings-watts at 25°C (W/Cell)

| F.V/Time | 5MIN | 15MIN | 30MIN | 1HR | 2HR | 3HR | 5HR | 8HR | 10HR | 24HR |
|----------|--------|--------|--------|--------|--------|--------|--------|-------|-------|-------|
| 1.60V | 736.60 | 616.90 | 491.20 | 350.10 | 225.90 | 167.30 | 110.50 | 73.80 | 60.20 | 27.20 |
| 1.70V | 673.50 | 571.00 | 453.00 | 308.00 | 201.20 | 151.40 | 104.20 | 69.50 | 57.10 | 26.10 |
| 1.75V | 652.50 | 549.50 | 437.60 | 296.00 | 194.10 | 145.90 | 101.70 | 66.90 | 56.20 | 25.90 |
| 1.80V | 634.50 | 523.80 | 422.10 | 289.10 | 190.50 | 140.70 | 98.80 | 65.20 | 55.30 | 25.50 |
| 1.85V | 577.00 | 477.00 | 375.40 | 263.00 | 175.00 | 133.20 | 94.20 | 63.10 | 53.20 | 24.50 |
| 1.90V | 509.20 | 414.00 | 316.60 | 226.50 | 151.90 | 123.60 | 88.00 | 59.00 | 49.30 | 22.90 |